


### **SPECIFICATION**

# CSDK63G2C



Part Number	Chip Material	Color of Emission	Lens Type	Viewing Angle
CSDK63G2C	InGaAIP	Green	Water Clear	55°

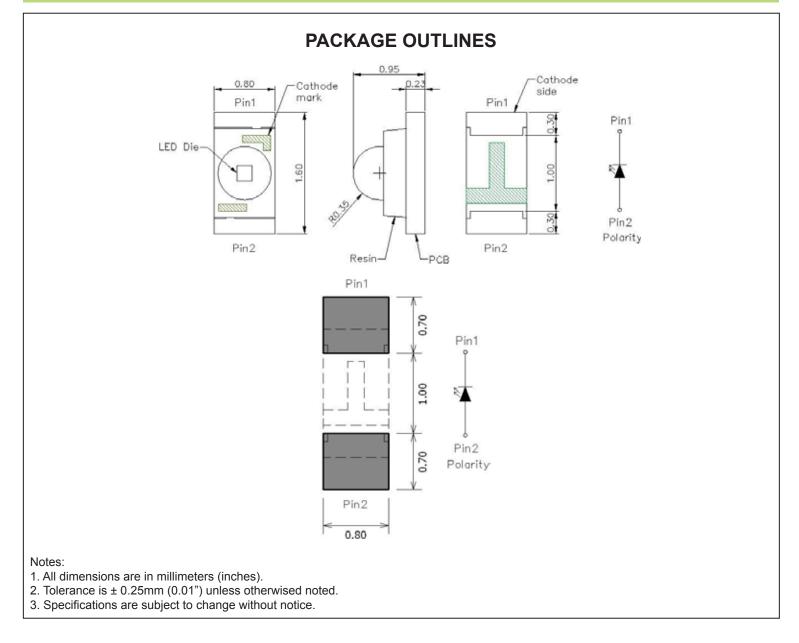



## ABSOLUTE MAXIMUM RATINGS

### (TA=25°C)

Parameter	Symbol	Max Rating	Unit
Forward Current	lf	20	mA
Reverse Current @ 5V	lr	10	μA
Power Dissipation	Pd	78	mW
Operating Temperature Range	Тор	-40~+85	°C
Storage Temperature Range	Тѕтс	-40~+100	°C
Peak Pulsing Current (1/10 duty f = 10KHz)	IFP	60	mA
Soldering Temperature	Tsol	Max 260°C for 10 sec Max	

# **OPTICAL-ELECTRICAL CHARACTERISTICS**

Value **Test Condition** Parameter Symbol Unit Min Тур Max 270 Luminous Intensity Iv  $I_F = 20 \text{mA}$ \_ \_ mcd Forward Voltage IF = 20mA 2.1 2.4 V VF \_ Reverse Leakage Current 10  $V_R = 5V$ IR \_ \_ μA Viewing Angle at 50% Iv  $2\theta 1/2$ IF = 20mA 55 \_ Deg \_ Peak Wavelength IF = 20mA 573 λP \_ nm \_ **Dominant Wavelength** IF = 20mA 571 λD \_ \_ nm

\*Tolerance of viewing angle: -10 / +5 deg.




ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com

# (TA=25°C)



# **OPTICAL CHARACTERISTIC CURVES**

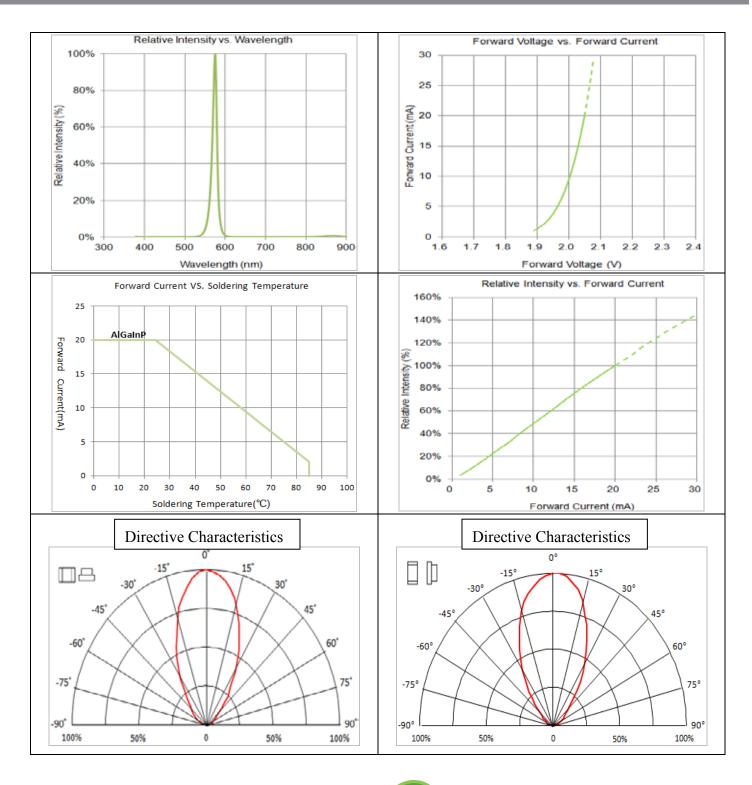






## PACKAGING SPECIFICATION

#### **Reel Dimension**

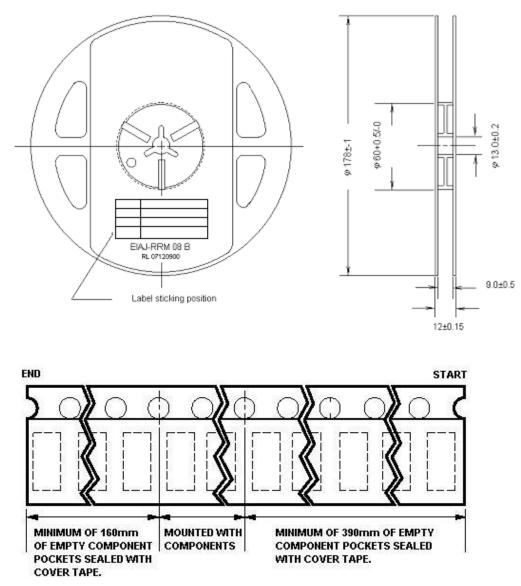






### SOLDERING CONDITIONS

#### **Reflow Soldering**

Recommend soldering paste specifications:

- 1. Operating temp.: Above  $220^{\circ}$ C ,60sec
- 2. Peak temp.:260°C Max.,10sec Max.
- 3. Reflow soldering should not be done more than two times.
- 4. Never take next process until the component is cooled down to room temperature after reflow.
- 5. The recommended reflow soldering profile (measuring on the surface of the LED terminal) is following:

Lead-free Solder Profile

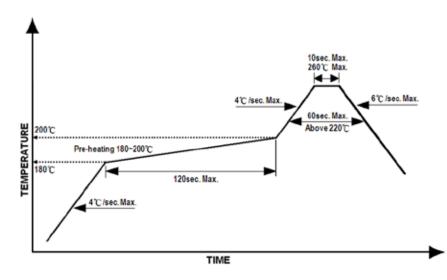

#### Reworking

- Rework should be completed within 5 seconds under  $260^{\circ}$ C.
- The iron tip must not come in contact with the copper foil.
- Twin-head type is preferred.

#### Cleaning

Following are cleaning procedures after soldering:

- An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.
- Temperature x Time should be 50  $^\circ\!\mathrm{C}$  x 30sec. or <30  $^\circ\!\mathrm{C}$  x 3min
- Ultra sonic cleaning: < 15W/ bath; bath volume ≤ 1liter
- Curing: 100°C max, <3min

